

Scissor lift | Under floor

Item No.: TWS3-18U / TWS3-18U-G

3000 kg
 1,80 m
 230 V or 400 V
 Autom.

Description

Scissor lift TWS3-18U designed for under floor assembly. Ground level. It is the perfect lift for very low sports cars. Extendable runways (400 mm) allow you to lift vehicles with a long wheelbase.

Features


- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Acoustic Warning signal (foot protection)
- **IR-System (Light beam constantly ensures both platforms remain synchronised)**
- Hydraulic cylinders for powerful lifting and lowering
- High quality solid construction
- Automatic safety-lock-release system
- Platform extensions 400 mm
- Emergency lowering valve
- Extendable platforms
- Compressed air of 4-8 bar required
- Comfortable and easy-to-use control panel
- Lowers to ground level

Delivery contents

- Lift incl. Power unit
- Rubber blocks (40 mm)
- Heavy duty anchor bolts (8 pcs.)
- English instruction manuals
- Examination book | CE-Certificate
- **Assembly video online**
- **Product video online**




Choice of colour:




Videos



Vehicle type / Wheelbase

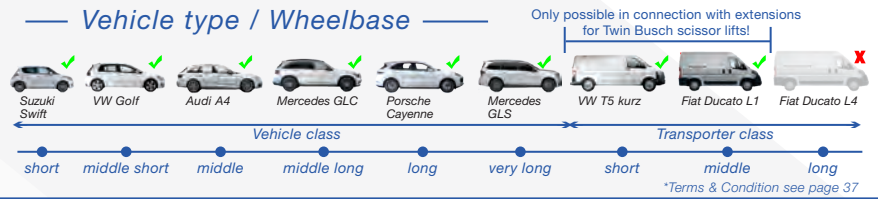

Dimensions

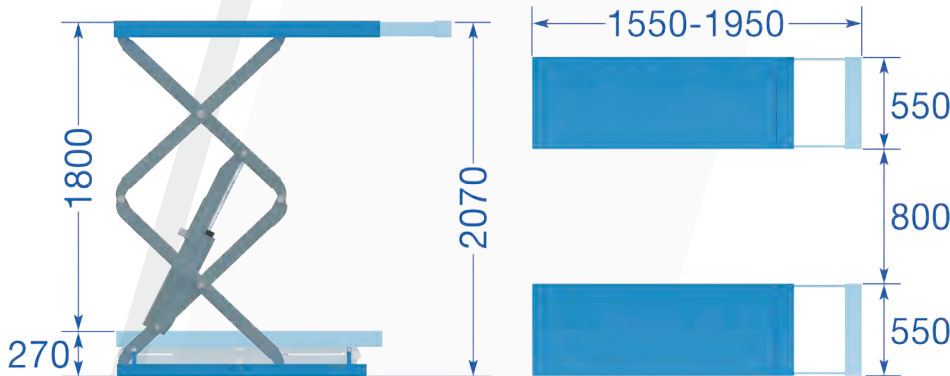

Technical Data

Lifting capacity	3000 kg
Lifting height max.	1800 mm + Rubber
Drive on height	in floor (0 mm)
Lifting, lowering time (approx.)	45/45 sec.
Power supply	400 V / 230 V
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	860 kg

Optional accessory

Further information to be found at www.twinbusch.co.uk



Further accessories can be found at www.twinbusch.co.uk